

RADIO WIRE SUB ASSY REPLACEMENT

670EH-01


HINT:

COMPONENTS: See page 67-2

1. REMOVE INSTRUMENT PANEL SUB-ASSY UPPER (See page 71-10)


HINT:

Refer to the instructions for removal of the instrument panel sub-assy upper.

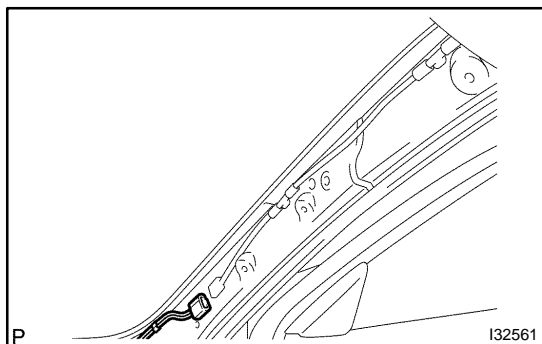

2. REMOVE RADIO WIRE SUB ASSY

- (a) Disconnect the connector.
- (b) Remove the 3 clamps and radio wire sub assy.

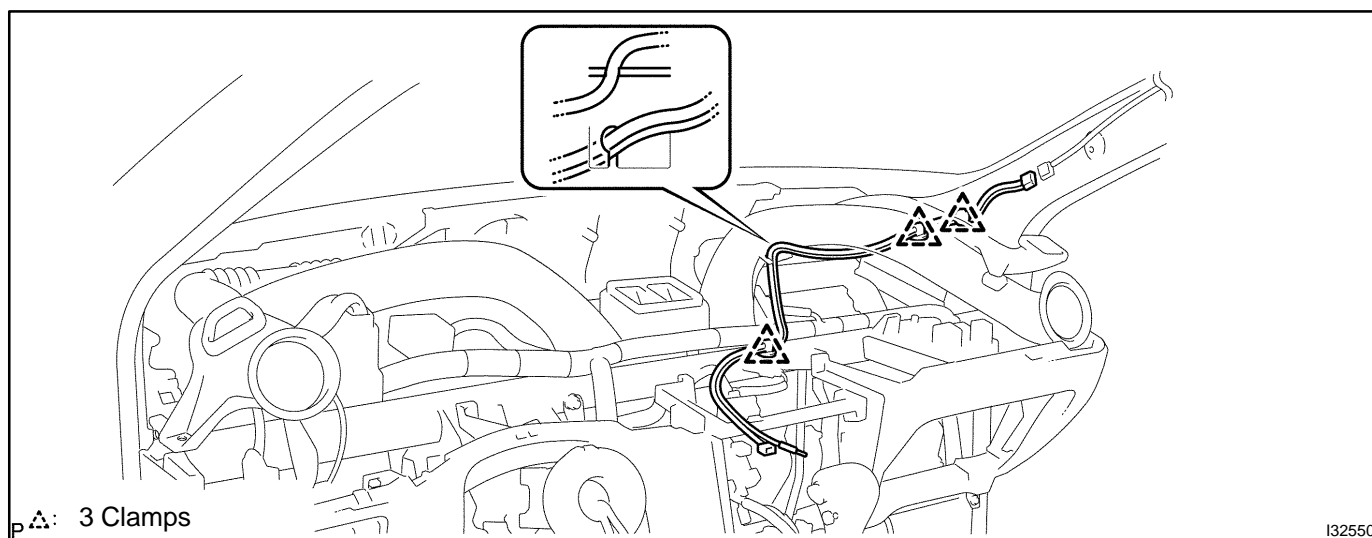

3. INSTALL INSTRUMENT PANEL SUB-ASSY UPPER (See page 71-10)