


FRONT DOOR BELT MOULDING ASSY LH REPLACEMENT

760IH-01

HINT:

- Installation is in the reverse order of the removal. But the installation is indicated only when it has a point.
- In the RH side, work in the same procedure as in the LH side.

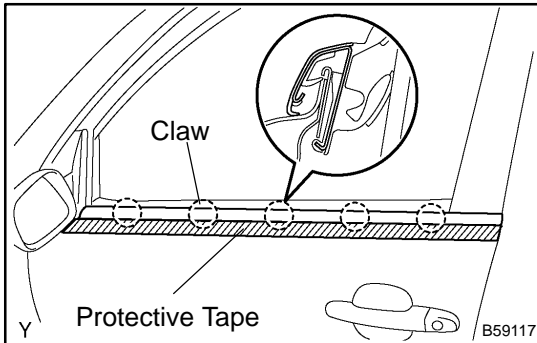

- 1. REMOVE FRONT DOOR BELT MOULDING ASSY LH**
 - (a) Put protective tape under the front door belt moulding.
 - (b) Using a moulding remover or scraper, remove the front door belt moulding.

HINT:

Tape the scraper tip before use.